

Double Side Digital Signage

20mm Ultra Thin Double Panel



EC i-Connect
True value in Signage

EC-FSS55A




Asia Pacific: Unit A, 2/F., Mai Tak Industrial Building #221 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong
Tel: (852) 3590 6397 | Fax: (852) 3590 6497 | www.eclinepos.com | sales@ecline.com.hk

México, E.U.A, Latinoamérica: Nueva Irlanda #4057, Fracc. Industrial Lincoln, C.P. 64310, Monterrey, N.L. México.
+52 (81) 8370-5096 | 01 800 509-1818 | www.eclinepos.com | ventas@ecline.com.mx

Split Screen Function

Displays Multi-media
Simultaneously




Scheduled Boardcast



Auto play preset programs in different date & time.
Manual control is not needed.

Edit & Release via Internet

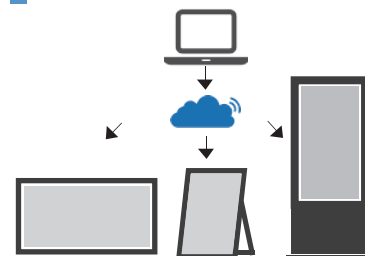

Specifications

MODEL	EC-FSS55A
LCD PANEL	
Panel size	55 inch
Display Area (mm)	1209.6(H) × 680.4(V)
Display Mode	16 : 9
LCD Type	LED-backlit LCD
Resolution	1920 × 1080
Brightness	420 cd/m ²
Response Time	8 ms
Color system	PAL / NTSC / Auto
Field Frequency	60 Hz
Contrast Ratio	3500:1
View-angle(up/down/left/right)	89° / 89° / 89° / 89°
MEDIA FORMAT	
System	Android Operating System
Royal TS	B/S TS
Media format	wmv, avi, flv, rm, rmvb, mpeg , ts, mp4
Text format	txt, pdf, doc, docx, xls, xlsx, ppt, pptx
Picture format	bmp, jpeg, gif, png
SYSTEM	
CPU	Quad-core ARM Cortex A17
RAM	DDR3 2GB
Internal memory	EMMC 8GB (4GB Available)
Wireless	Onboard · 802.11b/g/n
INTERFACE	
USB	USB2.0 x 4
POWER	
Audio system	Built-in 8 Ω 10 w x 2 speakers
Power Requirement	AC100V ~ 240V · 50/60Hz
Power Consumption - Typical	≤175W
Power Consumption - Standby	< 1W
PHYSICAL SPECIFICATIONS	
Frame material	Aluminum Frame + Metal Stage
Dimensions (H x W x D)	Top: 1958 x 728 x 20.4 Base: 1958 x 760 x 463
Net weight (KG)	52
Range of application	Indoor
ENVIRONMENTAL CONDITIONS	
Operating temperature	0℃~40℃
Storage temperature	10℃~80℃
ACCESSORIES	
Included	Power cord