

EM Card Reader



EC-EM-302

Features

- Registration ID card for access control system
- System login / logout application
- Member system
- POS. (Inventory management, logistics system, food and drinks industry etc.)
- Support Android system

Specifications

Dimensions
Weight

70 (W) X 105 (L) X 11.8 (H) mm
140g (with USB Cable)

Interface


Mini USB

Operating Voltage Range
Standby Current
Max. Operation Current
Supported Transponders
Read Card Distance
Operation Frequency
Communication Speed

5 VDC (USB Powered)
70 mA
90 mA
EM Cards
5 - 8 cm
125 kHz
106 Kbit/s

Operating Environment
Operating Temperature Range
Storage Temperature Range
Relative Humidity Range

Indoor Use
-10°C to 70°C
-20°C to 83°C
0 to 90% (non-condensing)

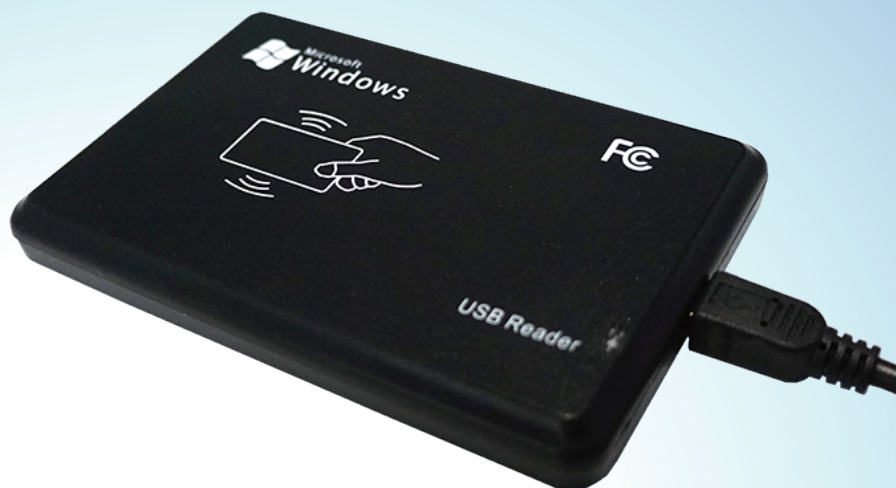

Asia, Pacific & Europe: Unit A, 2/F., Mai Tak Industrial Building #221 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong
Tel: (852) 3590 6397 | Fax: (852) 3590 6497 | www.eclinepos.com | sales@ecline.com.hk

México, E.U.A, Latinoamérica: Nueva Irlanda #4057, Fracc. Industrial Lincoln, C.P. 64310, Monterrey, N.L. México.
+52 (81) 8370-5096 | 01 800 509-1818 | www.eclinepos.com | ventas@ecline.com.mx