



EC PM-X30 SERIES

ECLINE
POS THERMAL PRINTER

EC ELECTRONICS, LIMITED

EC-PM-X30 SERIES




- 58mm/80mm/82.5mm paper width available
- IAP function supports firmware update within 5S. Make printer maintained easily.
- Reliable cutter with intelligent code to prevent cutter from cutter jammed.
- Emulation Driver ESC/POS Windows/ JPOS/ Linux/ Android/ Mac.
- Metallic frame mechanism



Specification

Print Method	Direct Thermal	Column Capacity	576 dots/line (adjustable by command)
Print Width	79.5±0.5mm	Print Speed	300mm/s Max.
Paper thickness	0.06~0.08mm	Interface	USB+ Lan/ USB+ Serial (RS232) + Wi-Fi
Character Size	ANK, Font A: 1.5 x 3.0 mm (12x2 4 dots) Font B: 1.1x2.1 mm (9x17 dots) Chinese, traditional Chinese :3.0 x 3.0 mm (24 x24 dots)		
Code Page	PC347(Standard Europe)/ Katakana/ PC850(Multilingual) / PC860(Portuguese) / PC863(Canadian-French) / PC865(Nordic) / West Europe / Greek / Hebrew/ East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / Pc858 / Iranll / Latvian / Arabic / PT151(1251)		
Barcode Types	UPC-A/ UPC-E/ JAN13(EAN13)/ JAN8(EAN8)/ CODE39/ ITF/ CODABAR/ CODE93/ CODE128		
Input Buffer	2048 Kbytes	NV Flash	256 Kbytes
Power Source	DC 24V/2.5A	Power Adaptor	AC220V, 50~60Hz
Cash Drawer Output	DC 24V/1A	Auto Cutter	Partial
Cutter Life	2 million cuts	Printer Head Life	150 KM
Work Environment	Temperature (0 ~ 45°C) Humidity (10 ~ 80%)	Storage Environment	Temperature (-10 ~ 60°C) Humidity (10 ~ 80%)
Weight	1.115 Kg	Dimensions	133D x 126W x 130H mm

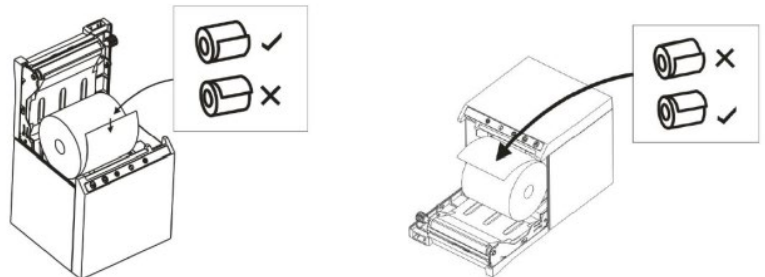

*All rights reserved. All specifications are subject to change without notice.

保留隨時更改本文中產品相關描述之權利，若有更改恕不另行通知。



EC Electronics, Limited

3/F., 203 Wai Yip Street, Kwun Tong, Kowloon, Hong Kong.

Contact Number: 3590 6397

Email Address: sales@ecline.com.hk

Website : www.ecline.com.hk

